


## Deep groove ball bearing single row 7210-B-2RS-TVP-FAG - 7210-B-2RS-TVP-FAG

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/single-row/7210-b-2rs-tvp-fag>

**Angular contact ball bearings 7210-B-2RS-TVP**  
main dimensions to DIN 629-1, contact angle  $\alpha = 40^\circ$ , lip seals on both sides

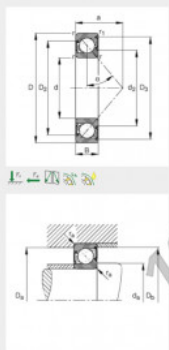

d	50 mm
D	90 mm
B	20 mm
a	39 mm
D <sub>2</sub>	77.4 mm
D <sub>1</sub>	84.6 mm
D <sub>2max</sub>	83 mm
D <sub>1max</sub>	85.8 mm
d <sub>2</sub>	66.3 mm
f <sub>e</sub>	37 mm
f <sub>e1</sub>	0.6 mm
f <sub>e2</sub>	0.8 mm
f <sub>e3</sub>	0.8 mm
f <sub>e4</sub>	1.1 mm
f <sub>e5</sub>	1.1 mm
f <sub>e6</sub>	1.1 mm
f <sub>e7</sub>	1.1 mm
f <sub>e8</sub>	1.1 mm
f <sub>e9</sub>	1.1 mm
f <sub>e10</sub>	1.1 mm
f <sub>e11</sub>	1.1 mm
f <sub>e12</sub>	1.1 mm
f <sub>e13</sub>	1.1 mm
f <sub>e14</sub>	1.1 mm
f <sub>e15</sub>	1.1 mm
f <sub>e16</sub>	1.1 mm
f <sub>e17</sub>	1.1 mm
f <sub>e18</sub>	1.1 mm
f <sub>e19</sub>	1.1 mm
f <sub>e20</sub>	1.1 mm
f <sub>e21</sub>	1.1 mm
f <sub>e22</sub>	1.1 mm
f <sub>e23</sub>	1.1 mm
f <sub>e24</sub>	1.1 mm
f <sub>e25</sub>	1.1 mm
f <sub>e26</sub>	1.1 mm
f <sub>e27</sub>	1.1 mm
f <sub>e28</sub>	1.1 mm
f <sub>e29</sub>	1.1 mm
f <sub>e30</sub>	1.1 mm
f <sub>e31</sub>	1.1 mm
f <sub>e32</sub>	1.1 mm
f <sub>e33</sub>	1.1 mm
f <sub>e34</sub>	1.1 mm
f <sub>e35</sub>	1.1 mm
f <sub>e36</sub>	1.1 mm
f <sub>e37</sub>	1.1 mm
f <sub>e38</sub>	1.1 mm
f <sub>e39</sub>	1.1 mm
f <sub>e40</sub>	1.1 mm
f <sub>e41</sub>	1.1 mm
f <sub>e42</sub>	1.1 mm
f <sub>e43</sub>	1.1 mm
f <sub>e44</sub>	1.1 mm
f <sub>e45</sub>	1.1 mm
f <sub>e46</sub>	1.1 mm
f <sub>e47</sub>	1.1 mm
f <sub>e48</sub>	1.1 mm
f <sub>e49</sub>	1.1 mm
f <sub>e50</sub>	1.1 mm
f <sub>e51</sub>	1.1 mm
f <sub>e52</sub>	1.1 mm
f <sub>e53</sub>	1.1 mm
f <sub>e54</sub>	1.1 mm
f <sub>e55</sub>	1.1 mm
f <sub>e56</sub>	1.1 mm
f <sub>e57</sub>	1.1 mm
f <sub>e58</sub>	1.1 mm
f <sub>e59</sub>	1.1 mm
f <sub>e60</sub>	1.1 mm
f <sub>e61</sub>	1.1 mm
f <sub>e62</sub>	1.1 mm
f <sub>e63</sub>	1.1 mm
f <sub>e64</sub>	1.1 mm
f <sub>e65</sub>	1.1 mm
f <sub>e66</sub>	1.1 mm
f <sub>e67</sub>	1.1 mm
f <sub>e68</sub>	1.1 mm
f <sub>e69</sub>	1.1 mm
f <sub>e70</sub>	1.1 mm
f <sub>e71</sub>	1.1 mm
f <sub>e72</sub>	1.1 mm
f <sub>e73</sub>	1.1 mm
f <sub>e74</sub>	1.1 mm
f <sub>e75</sub>	1.1 mm
f <sub>e76</sub>	1.1 mm
f <sub>e77</sub>	1.1 mm
f <sub>e78</sub>	1.1 mm
f <sub>e79</sub>	1.1 mm
f <sub>e80</sub>	1.1 mm
f <sub>e81</sub>	1.1 mm
f <sub>e82</sub>	1.1 mm
f <sub>e83</sub>	1.1 mm
f <sub>e84</sub>	1.1 mm
f <sub>e85</sub>	1.1 mm
f <sub>e86</sub>	1.1 mm
f <sub>e87</sub>	1.1 mm
f <sub>e88</sub>	1.1 mm
f <sub>e89</sub>	1.1 mm
f <sub>e90</sub>	1.1 mm
f <sub>e91</sub>	1.1 mm
f <sub>e92</sub>	1.1 mm
f <sub>e93</sub>	1.1 mm
f <sub>e94</sub>	1.1 mm
f <sub>e95</sub>	1.1 mm
f <sub>e96</sub>	1.1 mm
f <sub>e97</sub>	1.1 mm
f <sub>e98</sub>	1.1 mm
f <sub>e99</sub>	1.1 mm
f <sub>e100</sub>	1.1 mm
m	0.468 kg Mass
C	35000 N Basic dynamic load rating, radial
C <sub>0</sub>	28500 N Basic static load rating, radial
n <sub>0</sub>	4300 1/min Limiting speed
n <sub>B</sub>	- 1/min Reference speed
C <sub>r</sub>	1920 N Fatigue limit load, radial

### PRODUCT FEATURES

Brand	FAG
N° Ean13	3663952347905
Inside diameter	50 mm
Sealing	Seal on both sides
Outside diameter	90 mm
Thickness	20 mm
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE