


## Needle roller bearing NAF152813-IKO - NAF152813-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/needle/naf152813-iko>

**IKO**  
**NEEDLE ROLLER BEARINGS WITH SEPARABLE CAGE**  
With Inner Ring

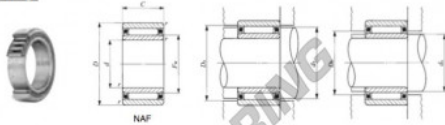

Shaft dia. mm	Identification number	Mess (Ref.) g	Boundary dimensions mm					Standard mounting dimensions mm				
			$d$	$D$	$C$	$r_s$ (1) mm	$F_w$	$d_b$ Max.	$D_b$ Min.	$d_a$ Max.	$D_b$ Max.	
15	<b>NAF 152813</b>	38.5	15	28	13	0.3	20	23.6	28	17	19	20.6
Basic dynamic load rating $C$	Basic static load rating $C_0$	Allowable rotational speed (2) rpm	Assembled roller ring									
N	N	N	LRT 152013									
9 590	13 500	25 000										

Notes: (1) Minimum allowable value of chamfer dimension  $r$ .  
(2) Allowable rotational speed applies to grease lubrication.  
Remark: The outer ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952384436
Inside diameter	15 mm
Outside diameter	28 mm
Thickness	13 mm
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE