


## GE Rod end SBB72-2RS-IKO - SBB72-2RS-IKO

<https://www.123bearing.co.uk/bearing-housing/rod-end/ge/sbb72-2rs-iko>

**IKO**  
**SPHERICAL BUSHINGS**  
Steel-on-steel Spherical Bushings Inch Series

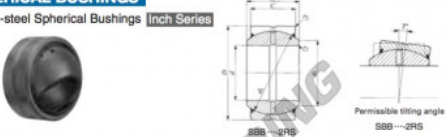

Shaft dia. mm (inch)	Identification number		Mass (Ref.) kg	Boundary dimensions mm(inch)			
	Without seal	With seals		d	D	B	C
<b>114.300</b> (4 1/2)		<b>SBB 72-2RS</b>	9.94	114.300 (4 1/2)	177.800 (7)	100.00 (3.937)	85.72 (3.375)
Radial internal clearance mm Min./Max.	Mounting dimensions mm		Dynamic load capacity C <sub>d</sub> N	Static load capacity C <sub>s</sub> N			
	d <sub>k</sub>	d <sub>1</sub> r <sub>1</sub> max. r <sub>2</sub> max.		C <sub>d</sub>	C <sub>s</sub>		
164 (6.457)	0.13 / 0.23	129.8 0.8 1.1	1 380 000	8 270 000			

Notes: (1) Minimum allowable value of chamfer dimensions r<sub>1</sub> and r<sub>2</sub>.  
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d<sub>k</sub>.  
Remark: 1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.  
2. Not provided with prepacked grease. Perform proper lubrication for use.

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952393056
Inside diameter	114.3 mm
Outside diameter	177.8 mm
Thickness	100 mm
Type	GE
Lubrication	without
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE