


## Cam follower CF8-VBRM-IKO - CF8-VBRM-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cf8-vbrm-iko>



### CAM FOLLOWERS

Standard Type Cam Followers Full Complement Type/With Hexagon Hole

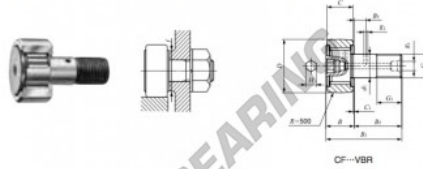

Stud dia. mm	Identification number				Mass (Ref.)	
	Shield type		Sealed type		$g$	$D$
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	$C$	$d_1$
8	CF	B	VBRM		29	19 11 8

Boundary dimensions mm										Mounting dimension $f$ Min. mm	Maximum tightening torque N-m	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Maximum allowable static load N	
$G$	$G_1$	$B$ max	$B_1$ max	$B_2$	$B_3$	$C_1$	$g_1$	$g_2$	$H$ K/min						
M 8×1	10	12.2	32.2	20	—	0.6	—	—	4	0.3	13	7.1	8 170	11 200	4 620

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952441788
Inside diameter	8 mm
Outside diameter	19 mm
Thickness	11 mm
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE