


## Cam follower CFES10-R-IKO - CFES10-R-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cfes10-r-iko>

IKO

### CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers With Cage/With Screwdriver Slot

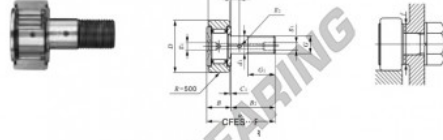

| Stud dia.<br>mm | Identification number   |                             |                         |                         |                             |                             | Mass (Ref.) |    |    |                |
|-----------------|-------------------------|-----------------------------|-------------------------|-------------------------|-----------------------------|-----------------------------|-------------|----|----|----------------|
|                 | Shield type             |                             |                         | Sealed type             |                             |                             | g           | D  | C  | d <sub>1</sub> |
|                 | With crowned outer ring | With cylindrical outer ring | With crowned outer ring | With crowned outer ring | With cylindrical outer ring | With cylindrical outer ring |             |    |    |                |
| 10              | CFES 10                 | R                           |                         |                         |                             |                             | 45          | 22 | 12 | 10             |

| Boundary dimensions mm |                |      |                |                |                |                |                |   |                    |     |
|------------------------|----------------|------|----------------|----------------|----------------|----------------|----------------|---|--------------------|-----|
| G                      | G <sub>1</sub> | B    | B <sub>1</sub> | B <sub>2</sub> | B <sub>3</sub> | C <sub>1</sub> | B <sub>1</sub> | z | f <sub>scale</sub> | E   |
| M10×1.25               | 12             | 13.2 | 36.2           | 23             | —              | 0.6            | *4             | — | 0.3                | 0.3 |

| Mounting dimension f | Maximum tightening torque | Basic dynamic load rating C | Basic static load rating C <sub>0</sub> | Maximum allowable static load |
|----------------------|---------------------------|-----------------------------|-----------------------------------------|-------------------------------|
| mm                   | N·m                       | N                           | N                                       | N                             |
| 16                   | 13.8                      | 5 430                       | 6 890                                   | 6 890                         |

## PRODUCT FEATURES

|                  |               |
|------------------|---------------|
| Brand            | IKO           |
| N° Ean13         | 3616060459121 |
| Inside diameter  | 10 mm         |
| Outside diameter | 22 mm         |
| Thickness        | 12 mm         |
| Packaging        | 1             |

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE