


Cam follower CFES12-UUR-IKO - CFES12-UUR-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cfes12-uur-iko>

IKO

CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers With Cage/With Screwdriver Slot

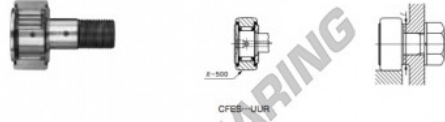

Stud dia. mm	Identification number						Mass (Ref.)		
	Shield type		Sealed type		g	D	C	d ₁	
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring					
12			CFES 12	UUR	95	30	14	12	

Boundary dimensions mm										Mounting dimension f Min. mm	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N	
G	G ₁	B _{max}	B _{1 max}	B ₂	B ₃	C ₁	B ₁	B ₂	β ₂						
M12×1.5	13	15.2	40.2	25	6	0.6	6	3	0.6	0.4	21	21.9	7 910	9 790	9 790

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060459237
Inside diameter	12 mm
Inside diameter	0.472" inch
Outside diameter	30 mm
Outside diameter	1.181" inch
Thickness	14 mm
Thickness	0.551" inch
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE