


Cam follower CFES16-UUR-IKO - CFES16-UUR-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cfes16-uur-iko>

IKO

CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers With Cage/With Screwdriver Slot

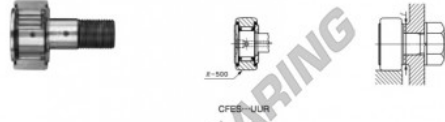

Stud dia. mm	Identification number						Mass (Ref.)			
	Shield type			Sealed type			g	D	C	d ₁
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	CFES 16	UUR				
16							170	35	18	16

Boundary dimensions mm										Mounting dimension f Min. mm	Maximum tightening torque N-m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N	
G	G ₁	B	B ₁ max	B ₂ max	B ₃	C ₁	B ₁	B ₂	ε						
M16×1.5	17	19.6	52.1	32.5	8	0.8	6	3	0.6	0.5	26	58.5	12 000	18 300	18 300

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060459305
Inside diameter	16 mm
Outside diameter	35 mm
Thickness	18 mm
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE