


Cam follower CFE30-1-IKO - CFE30-1-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cfe30-1-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers With Cage/With Screwdriver Slot

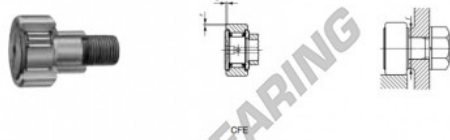

Outside diameter of eccentric roller mm	Identification number						Mass (Ref.)			
	Shield type			Sealed type			Ø	D	C	d ₂
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
41	CFE 30-1						2 190	85	35	41

Boundary dimensions mm										Essentiality g	Mounting dimension f mm	Maximum tightening torque N-m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
G	B ₃	B max	B ₁ max	B ₂	C ₁	G ₁	(1) r _{max}	e	1						
M30×1.5	32.5	37	100	63	1	8	30.5	1	1.5	49	438	45 400	85 100	85 100	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060460226
Inside diameter	41 mm
Outside diameter	85 mm
Thickness	35 mm
Weight	2190 g
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE