


## Cam follower CFE30-2-IKO - CFE30-2-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cfe30-2-iko>

IKO

### CAM FOLLOWERS

Eccentric Type Cam Followers With Cage/With Screwdriver Slot

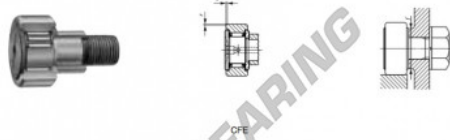

Outside diameter of eccentric roller mm	Identification number						Mass (Ref.)			
	Shield type			Sealed type			Ø	D	C	d <sub>2</sub>
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
41	CFE 30-2						2 380	90	35	41

Boundary dimensions mm										Essentiality g	Mounting dimension f mm	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Maximum allowable static load N
G	B <sub>3</sub>	B max	B <sub>1</sub> max	B <sub>2</sub>	C <sub>1</sub>	G <sub>1</sub>	( <sup>1</sup> ) r <sub>max</sub>	e	g						
M30×1.5	32.5	37	100	63	1	8	30.5	1	1.5	49	438	45 400	85 100	85 100	

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060460288
Inside diameter	41 mm
Outside diameter	90 mm
Thickness	35 mm
Weight	2380 g
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE