


Cam follower CFE30-VB-IKO - CFE30-VB-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cfe30-vb-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Hexagon Hole

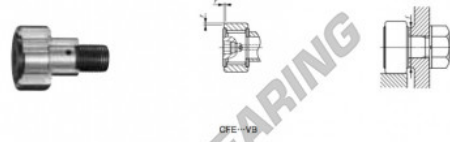

| Outside diameter of eccentric roller mm | Identification number | | | | | | Mass (Ref.) | | | |
|---|-------------------------|-----------------------------|-------------------------|-----------------------------|--|--|-------------|----|----|----------------|
| | Shield type | | | Sealed type | | | g | D | C | d _e |
| | With crowned outer ring | With cylindrical outer ring | With crowned outer ring | With cylindrical outer ring | | | | | | |
| 41 | CFE 30 VB | | | | | | 2 030 | 80 | 35 | 41 |

| Boundary dimensions mm | | | | | | | | | | | | | | | |
|------------------------|----------------|-----------------------|-----------------------|----------------|----------------|---|-------------------------|-------------------|---------------------------------------|--------------------------------|-------------------------------------|---|------------------------------------|---------|--------|
| G | B ₃ | B ₁ max | B ₂ max | C ₁ | G ₁ | H | H _{max} (°) | Eccentricity g | Mounting dimension f Min. mm | Maximum splining torque N·m | Basic dynamic load rating C N | Basic static load rating C ₀ N | Maximum allowable static load N | | |
| M30×1.5 | 32.5 | 37 | 100 | 63 | 1 | 8 | 30.5 | 17 | 1 | 1.5 | 49 | 438 | 67 700 | 144 000 | 85 900 |

PRODUCT FEATURES

| | |
|------------------|---------------|
| Brand | IKO |
| N° Ean13 | 3616060460776 |
| Inside diameter | 41 mm |
| Inside diameter | 1.614" inch |
| Outside diameter | 80 mm |
| Outside diameter | 3.15" inch |
| Thickness | 35 mm |
| Thickness | 1.378" inch |
| Weight | 2030 g |
| Packaging | 1 |

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE