


Cam follower CFE6-VUUR-IKO - CFE6-VUUR-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cfe6-vuur-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Screwdriver Slot

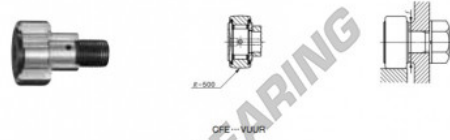

Outside diameter of eccentric outer ring mm	Identification number				Mass (Ref.)									
	Shield type		Sealed type		g	D	C	d _e						
9	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	21	16	11	9						
	CFE 6 VUUR													
Boundary dimensions mm														
G	B ₃	B _{max}	B ₂ max	B ₂	C ₁	β ₁	G ₁	r ₁ min	Excentricity E	Mounting dimension f Min. mm	Maximum ignoring torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
M 6 × 1	7.5	12.2	28.2	16	0.6	*4	8.5	0.3	0.4	11	2.7	6 980	8 500	1 950

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060460875
Inside diameter	9 mm
Outside diameter	16 mm
Thickness	11 mm
Weight	21 g
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE