


## Cam follower CFE10-VUUR-IKO - CFE10-VUUR-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cfe10-vuur-iko>

IKO

### CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Screwdriver Slot

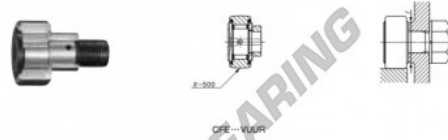

Outside diameter of eccentric outer ring mm	Identification number				Mass (Ref.)			
	Shield type		Sealed type		g	D	C	d <sub>e</sub>
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
13	CFE 10 VUUR				50.5	22	12	13

Boundary dimensions mm										Eccentricity E	Mounting dimension f Min. mm	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Maximum allowable static load N
G	B <sub>3</sub>	B <sub>max</sub>	B <sub>1</sub> max	B <sub>2</sub>	C <sub>1</sub>	g <sub>1</sub>	G <sub>1</sub>	r <sub>1</sub> min	r <sub>2</sub> min						
M10 × 1.25	10.5	13.2	36.2	23	0.6	*4	12.5	0.3	0.4	16	13.8	9 570	14 500	8 650	

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060460950
Inside diameter	13 mm
Outside diameter	22 mm
Thickness	12 mm
Weight	50.5 g
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE