


Cam follower CFE18-VUUR-IKO - CFE18-VUUR-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cfe18-vuur-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Screwdriver Slot

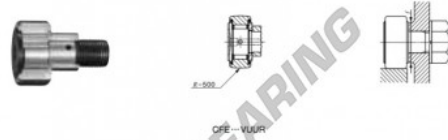

Outside diameter of eccentric outer ring mm	Identification number				Mass (Ref.) g	D	C	d _e
	Shield type		Sealed type					
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
24			CFE 18	VUUR	285	40	20	24

Boundary dimensions mm														
G	B ₃	B _{max}	B ₁ _{max}	B ₂	C ₁	g ₁	G ₁	r ₁ ^(*) _{min}	Eccentricity E	Mounting diameter f Min. mm	Maximum operating torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
M18 X 1.5	17.5	21.6	58.1	36.5	0.8	6	19	1	0.8	29	86.2	25 300	51 300	31 100

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060461155
Inside diameter	24 mm
Inside diameter	0.945" inch
Outside diameter	40 mm
Outside diameter	1.575" inch
Thickness	20 mm
Thickness	0.787" inch
Weight	285 g
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE