


Cam follower CFE20-VUUR-IKO - CFE20-VUUR-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cfe20-vuur-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers **Full Complement Type/With Screwdriver Slot**

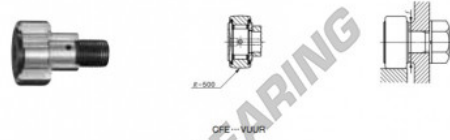

Outside diameter of eccentric outer ring mm	Identification number				Mass (Ref.)			
	Shield type		Sealed type		g	D	C	d _e
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
27	CFE 20		VUUR		505	52	24	27

Boundary dimensions mm														
G	B ₃	B _{max}	B ₁ _{max}	B ₂	C ₁	g ₁	G ₁	r ₁ ⁽¹⁾ _{min}	Eccentricity E	Mounting diameter f Min. mm	Maximum operating torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
M20 × 1.5	19.5	25.6	66.1	40.5	0.8	8	21	1	0.8	34	119	33 200	64 500	37 500

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952458083
Inside diameter	27 mm
Outside diameter	52 mm
Thickness	24 mm
Weight	505 g
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE