


Cam follower CFE24-VUUR-IKO - CFE24-VUUR-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cfe24-vuur-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Screwdriver Slot

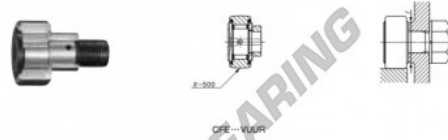

Outside diameter of eccentric roller mm	Identification number				Mass (Ref.)			
	Shield type		Sealed type		g	D	C	d _e
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
33	CFE 24		VUUR		900	62	29	33

Boundary dimensions mm														
G	B ₃	B _{max}	B ₁ _{max}	B ₂	C ₁	B ₁	G ₁	r ₁ _{min}	Eccentricity E	Mounting diameter f Min.	Maximum operating torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
M24 × 1.5	25.5	30.6	80.1	49.5	0.8	8	24	1	0.8	40	215	46 800	92 000	52 000

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952458168
Inside diameter	33 mm
Inside diameter	1.299" inch
Outside diameter	62 mm
Outside diameter	2.441" inch
Thickness	29 mm
Thickness	1.142" inch
Weight	900 g
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE