


## Cam follower CFE24-1-VUU-IKO - CFE24-1-VUU-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cfe24-1-vuu-iko>

IKO

### CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Screwdriver Slot

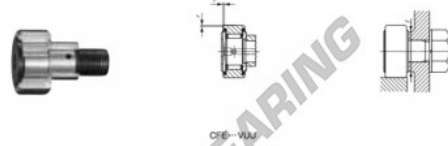

Outside diameter of eccentric outer ring mm	Identification number				Mass (Ref.) g	D	C	d <sub>e</sub>
	Shield type		Sealed type					
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
33				CFE 24-1 VUU	1 220	72	29	33

Boundary dimensions mm														
G	B <sub>3</sub>	B <sub>max</sub>	B <sub>1</sub> <sub>max</sub>	B <sub>2</sub>	C <sub>1</sub>	B <sub>1</sub>	G <sub>1</sub>	r <sub>1</sub> <sup>(1)</sup> <sub>min</sub>	Eccentricity E	Mounting dimension f Min. mm	Maximum operating torque N·m	Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Maximum allowable static load N
M24 × 1.5	25.5	30.6	80.1	49.5	0.8	8	24	1	0.8	40	215	46 800	92 000	52 000

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060461292
Inside diameter	33 mm
Outside diameter	72 mm
Thickness	29 mm
Weight	1220 g
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE