


Cam follower CR26-BUUR-IKO - CR26-BUUR-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cr26-buur-iko>

IKO

CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Hexagon Hole

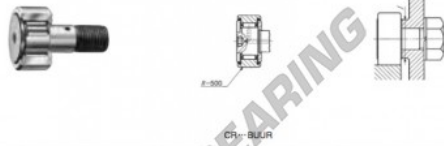

Stud dia. mm (inch)	Identification number				Mass (Ref.) g	D	C	d ₁	G UNF	G ₁	
	Shield type		Sealed type								
	With covered outer ring	With cylindrical outer ring	With covered outer ring	With cylindrical outer ring							
15.875 (5/8)	CR 26 BUUR				260	41.275 (1 1/2)	22.225 (7/8)	15.875 (5/8)	F ₁ -18	19.050 (3/4)	
Boundary dimensions mm/inch											
B max	B ₂	B ₃	C ₁	E ₁	E ₂	H	r	Bearing dimension f Mm (mm/inch)	Maximum tightening torque C N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N
23.8 (9/16)	26.100 (1 1/8)	9.525 (3/8)	0.794 (1/16)	4.702 (3/16)	3.969 (1/8)	7.938 (5/16)	1.588 (1/16)	26.196 (1 1/8)	55.7	19.600	24.300

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060462633
Inside diameter	15.875 mm
Inside diameter	5/8" inch
Outside diameter	41.275 mm
Outside diameter	1 5/8" inch
Thickness	22.225 mm
Thickness	7/8" inch
Weight	260 g
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE