


Cam follower CR12-R-IKO - CR12-R-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cr12-r-iko>

IKO

CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Screwdriver Slot

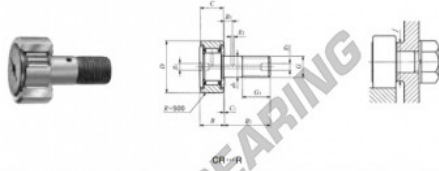

Stud dia. mm (inch)	Identification number				Mass (Ref.)	g	D	C	d ₁	G UNF	G ₁		
	Shield type	Sealed type											
	With covered outer ring	With cylindrical outer ring	With covered outer ring	With cylindrical outer ring									
9.525 ($\frac{3}{8}$)	CR 12 R				35	19.050	$\frac{7}{16}$	12.700	$\frac{1}{2}$	9.525	$\frac{7}{16}$	9.525	$\frac{7}{16}$
Boundary dimensions mm(inch)						Mounting dimension f mm (inch)	Maximum tightening torque C	Basic dynamic load rating C ₀	Basic static load rating C ₀				
B _{max}	B ₂	B ₃	C ₁	S ₁	S ₂					r	N·m	N	N
14.2 9/16	22.225 $\frac{7}{16}$	6.350 $\frac{1}{4}$	0.794 $\frac{1}{16}$	4.762 $\frac{3}{16}$	2.381 $\frac{1}{8}$	0.794 $\frac{1}{16}$	13.464 $\frac{1}{2}$	10.8	4 420	5 110			

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060462848
Inside diameter	9.525 mm
Outside diameter	19.05 mm
Thickness	12.7 mm
Weight	35 g
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE