


Cam follower CR26-UUR-IKO - CR26-UUR-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cr26-uur-iko>

IKO

CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Screwdriver Slot

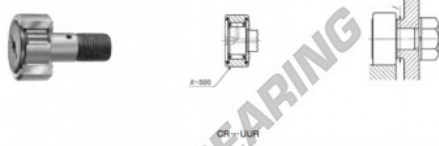

Stud dia. mm (inch)	Identification number				Mass (Ref.) g	D	C	d ₁	G UNF	G ₁
	Shield type With covered outer ring	Shield type With cylindrical outer ring	Sealed type With covered outer ring	Sealed type With cylindrical outer ring						
15.875 (5/8)			CR 26 / UUR		260	41.275 (1 1/2)	22.225 (7/8)	15.875 (5/8)		19.050 (3/4)
Boundary dimensions mm(inch)						Bearing dimension f Min. mm(inch)	Maximum tightening torque C N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	
B max	B ₂	B ₃	C ₁	δ ₁	δ ₂					r
23.8 (9/8)	38.100 (1 1/2)	9.525 (3/8)	0.794 (1/8)	4.702 (3/8)	3.969 (5/8)	1.588 (1/8)	26.199 (1 1/8)	55.7	18 800	24 300

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060463012
Inside diameter	15.875 mm
Outside diameter	41.275 mm
Thickness	22.225 mm
Weight	260 g
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE