


## Cam follower CR28-R-IKO - CR28-R-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cr28-r-iko>

IKO

### CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Screwdriver Slot

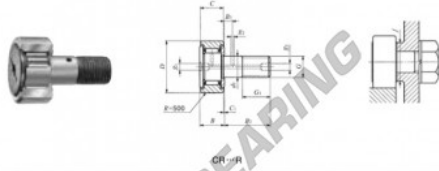

| Stud dia.<br>mm<br>(inch)    | Identification number      |                                |                            |                                | Mass<br>(Ref.)<br>g      | D                         | C   | d <sub>1</sub>                       | G<br>UNF                                       | G <sub>1</sub>                                |
|------------------------------|----------------------------|--------------------------------|----------------------------|--------------------------------|--------------------------|---------------------------|---|--------------------------------------|--|---|
|                              | Shield type                |                                | Sealed type                |                                |                          |                           |   |                                      |  |   |
|                              | With covered<br>outer ring | With cylindrical<br>outer ring | With covered<br>outer ring | With cylindrical<br>outer ring |                          |                           |   |                                      |  |   |
| 19.050<br>( $\frac{3}{4}$ )  | CR 28 R                    |                                |                            |                                | 365                      | 44.450 ( $1\frac{1}{2}$ ) | 25.400 (1)                                    | 19.050 ( $\frac{3}{4}$ )             | 7/-18  | 22.225 ( $\frac{7}{8}$ )                      |
| Boundary dimensions mm(inch) |                            |                                |                            |                                |                          |                           |   |                                      |  |   |
| B<br>max                     | B <sub>2</sub>             | B <sub>3</sub>                 | C <sub>1</sub>             | S <sub>1</sub>                 | S <sub>2</sub>           | r                         | Bearing<br>dimension<br>f<br>Min.<br>mm(inch) | Maximum<br>tightening<br>torque<br>C | Basic dynamic<br>load rating<br>C <sub>0</sub> | Basic static<br>load rating<br>C <sub>0</sub> |
| 25.8126                      | 44.450 ( $1\frac{1}{2}$ )  | 11.112 ( $\frac{7}{8}$ )       | 0.794 ( $\frac{1}{8}$ )    | 4.762 ( $\frac{3}{8}$ )        | 3.969 ( $\frac{5}{16}$ ) | 1.588 ( $\frac{1}{8}$ )   | 22.543 ( $1\frac{1}{8}$ )                     | 100                                  | 25 100   | 38 200  |

## PRODUCT FEATURES

|                  |               |
|------------------|---------------|
| Brand            | IKO           |
| N° Ean13         | 3616060463029 |
| Inside diameter  | 19.05 mm      |
| Outside diameter | 44.45 mm      |
| Thickness        | 25.4 mm       |
| Weight           | 365 g         |
| Packaging        | -             |

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE