


## Cam follower CRH12-VBR-IKO - CRH12-VBR-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/crh12-vbr-iko>

IKO

### CAM FOLLOWERS

Inch Series Heavy Duty Cam Followers Full Complement Type/With Hexagon Hole

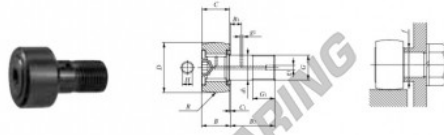

| Identification number        |             |             | Mass (Ref.) |    |                       |                      |                       |        |                     |                     |                     |
|------------------------------|-------------|-------------|-------------|----|-----------------------|----------------------|-----------------------|--------|---------------------|---------------------|---------------------|
| Stud dia.<br>mm<br>(inch)    | Shield type | Sealed type | 9           | 10 | D                     | C                    | d <sub>1</sub>        | G      | G <sub>1</sub>      | B                   | B max               |
| 11.112<br>( $\frac{7}{16}$ ) | CRH 12      | VBR         | 39          |    | 19.050 $\frac{7}{16}$ | 12.700 $\frac{1}{2}$ | 11.112 $\frac{7}{16}$ | UNF-20 | 9.525 $\frac{3}{8}$ | 14.6 $\frac{9}{16}$ | 14.6 $\frac{9}{16}$ |

| Boundary dimensions mm(inch) |                     |                      |                      |                      |                      |                     |  | Mounting dimension<br>F<br>mm(inch) | Maximum<br>tightening<br>torque<br>N·m | Basic dynamic<br>load rating<br>C<br>N | Basic static<br>load rating<br>C <sub>0</sub><br>N |
|------------------------------|---------------------|----------------------|----------------------|----------------------|----------------------|---------------------|--|-------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------------------|
| B <sub>2</sub>               | B <sub>3</sub>      | C <sub>1</sub>       | S <sub>1</sub>       | S <sub>2</sub>       | H                    | R                   |  |                                     |                                        |                                        |                                                    |
| 22.225 $\frac{7}{8}$         | 6.350 $\frac{1}{4}$ | 8.794 $\frac{5}{16}$ | 4.762 $\frac{3}{16}$ | 2.381 $\frac{1}{16}$ | 4.762 $\frac{3}{16}$ | 250 $\frac{10}{16}$ |  | 13.484 $\frac{1}{2}$                | 17.8                                   | 8 710                                  | 12 300                                             |

## PRODUCT FEATURES

|                  |               |
|------------------|---------------|
| Brand            | IKO           |
| N° Ean13         | 3663952462936 |
| Inside diameter  | 11.112 mm     |
| Outside diameter | 19.05 mm      |
| Thickness        | 12.7 mm       |
| Weight           | 39 g          |
| Packaging        | 1             |

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE