


Cam follower CRH24-V-IKO - CRH24-V-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/crh24-v-iko>

IKO

CAM FOLLOWERS

Inch Series Heavy Duty Cam Followers Full Complement Type/With Screwdriver Slot

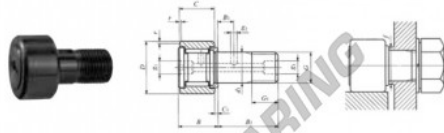

Stud dia. mm (inch)	Identification number		Mass (Ref.) g	D	C	d ₁	G LINE	G ₁	B max
	Shield type	Sealed type							
22.225 ($\frac{7}{8}$)	CRH 24	V	296	38.100 ($1\frac{1}{2}$)	22.225 ($\frac{7}{8}$)	22.225 ($\frac{7}{8}$)	$\frac{7}{8}$ -14	19.050 ($\frac{3}{4}$)	24.319
Boundary dimensions mm(inch)				Mounting dimension f mm(inch)	Maximum operating temp °C	Basic dynamic load rating C ₁₀	Basic static load rating C ₀		
B ₂	B ₃	C ₁	S ₁					S ₂	r
38.100 ($1\frac{1}{2}$)	8.525 ($\frac{1}{2}$)	1.588 ($\frac{1}{8}$)	4.782 ($\frac{3}{8}$)	2.381 ($\frac{1}{4}$)	1.588 ($\frac{1}{8}$)	26.988 ($1\frac{1}{8}$)	182	28 200	40 100

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060464620
Inside diameter	22.225 mm
Outside diameter	38.1 mm
Thickness	22.225 mm
Weight	296 g
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE