


Axial needle roller AZK17028015-IKO - AZK17028015-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/axial-needle/azk17028015-iko>

IKO

THRUST BEARINGS

Thrust Roller Bearings

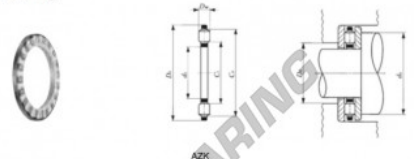

Shaft dia. mm	Identification number						
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g
170	AZ 17028039	11 300	AZK 17028015	4 020	WS 170280	GS 170280	3 640

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d _s Min.	D _s Max.	N	N	rpm
170	280	39	170.1	279	15	12	3	193	266	265	194	543 000	3 070 000	1 300

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060466778
Inside diameter	170 mm
Outside diameter	280 mm
Thickness	15 mm
Weight	4020 g
Packaging	-
Standard	No standard

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE