


Axial needle roller AZK22036020-IKO - AZK22036020-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/axial-needle/azk22036020-iko>

IKO
THRUST BEARINGS

Thrust Roller Bearings

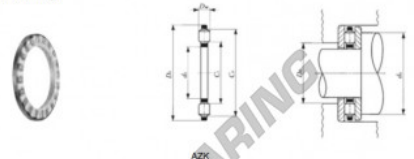

| Shaft dia. mm | Identification number | | | | | | |
|------------------|-----------------------|------------------|-----------------------|------------------|------------|------------|------------------|
| | Thrust roller bearing | Mass (Ref.) g | Thrust roller bearing | Mass (Ref.) g | Inner ring | Outer ring | Mass (Ref.) g |
| 220 | AZ 22036052 | 24 000 | AZK 22036020 | 8 000 | WS 220360 | GS 220360 | 8 000 |

| Boundary dimensions mm | | | | | | | | | | Standard mounting dimensions mm | | Basic dynamic load rating C | Basic static load rating C ₀ | Allowable rotational speed ⁽²⁾ |
|---------------------------|-----|----|----------------|----------------|----------------|----|--------------------|----------------|----------------|------------------------------------|------------------------|-----------------------------------|---|---|
| d | D | T | d _c | D _c | D _w | B | r _s (1) | C ₁ | C ₂ | d _s Min. | D _s Max. | N | N | rpm |
| 220 | 360 | 52 | 220.15 | 358 | 20 | 16 | 4 | 246 | 343 | 342 | 247 | 943 000 | 5 520 000 | 1 000 |

Notes: (1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUCT FEATURES

| | |
|------------------|---------------|
| Brand | IKO |
| N° Ean13 | 3663952487946 |
| Inside diameter | 220 mm |
| Outside diameter | 360 mm |
| Thickness | 20 mm |
| Weight | 8000 g |
| Packaging | 1 |

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE