


## SI Rod end SIZP4-S-DURBAL - SIZP4-S-DURBAL

<https://www.123bearing.co.uk/bearing-housing/rod-end/si/sizp4-s-durbal>

### SIZP4-S

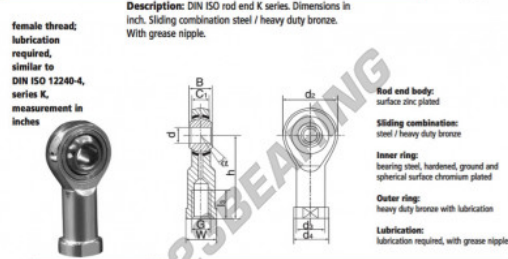

female thread:  
lubrication  
required,  
similar to  
DIN ISO 12240-4,  
series K,  
measurement in  
inches

Description: DIN ISO rod end K series. Dimensions in  
inch. Sliding combination steel / heavy duty bronze.  
With grease nipple.

Rod end body:  
surface zinc plated

Sliding combination:  
steel / heavy duty bronze

Inner ring:  
bearing steel, hardened, ground and  
spherical surface chromium plated

Outer ring:  
heavy duty bronze with lubrication

Lubrication:  
lubrication required, with grease nipple

order number		measurement [mm]						
right hand thread	left hand thread	d	G	B	C <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>
SIZP 4 S		4,83	10 - 32	7,92	6,35	15,88	7,54	10,31

type	inches	measurement [mm]			α [°]	load rating C <sub>r</sub> [kN]	weight [kg]
		l <sub>1</sub> min	W	h			
SIZP / SIZPL 4 S		14,27	7,92	26,97	10	4,6	0,015

## PRODUCT FEATURES

Brand	DURBAL
N° Ean13	3663952495613
Inside diameter	4.83 mm
Outside diameter	15.88 mm
Thickness	7.92 mm
Type	-
Weight	15 g
Thread	-
Lubrication	-
Packaging	-

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE