

TAPR Rod end GIHN-KL-63LO-DURBAL - DGIHN-KL-63LO-DURBAL


<https://www.123bearing.co.uk/bearing-housing/rod-end/tapr/dgihn-kl-63lo-durbal>

GIHN-KL-63LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

* without grease nipple

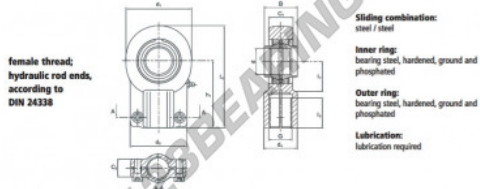

female thread;
hydraulic rod ends,
according to
DIN 24338

Sliding combination:
steel / steel
Inner ring:
bearing steel, hardened, ground and
phosphated
Outer ring:
bearing steel, hardened, ground and
phosphated
Lubrication:
lubrication required

order number	d	d ₁	measurement [mm]	G	d ₂	B	C ₁	C ₂
right hand thread								
left hand thread								
GIHN-KL 63 LO	63	136	M 48 x 2	70,0	114	63	53	38

type	l ₁ min	measurement [mm]	l ₂	l ₃	load rating	weight
					C ₀ [kN]	[kg]
GIHN-K / GIHN-KL 63 LO	64	140	213,0	62	430,0	7,60

PRODUCT FEATURES

Brand	DURBAL
N° Ean13	3663952500324
Inside diameter	63 mm
Outside diameter	136 mm
Thickness	53 mm
Type	TAPR
Weight	7600 g
Thread	Left-hand thread
Lubrication	with
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE