


Drawn cup roller bearing TLAM1416-IKO - TLAM1416-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/tlam1416-iko>

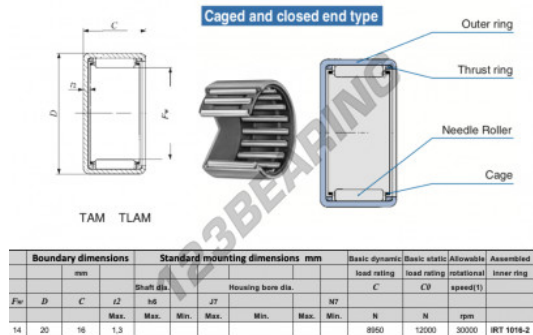

Boundary dimensions			Standard mounting dimensions mm						Basic dynamic	Basic static	Allowable	Assembled	
	mm		Shaft dia.		Housing bore dia.				load rating	load rating	rotational	inner ring	
<i>F_w</i>	<i>D</i>	<i>C</i>	<i>d2</i>	<i>h6</i>	<i>J7</i>		<i>N7</i>		<i>C</i>	<i>CV</i>	speed(1)		
			Max.	Max.	Min.	Max.	Min.	Max.	Min.	N	N	rpm	
14	20	16	1.3							8950	12000	30000	IRT 1016-2

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060598837
Inside diameter	14 mm
Outside diameter	20 mm
Thickness	16 mm
Limiting speed	30000 rpm
Dynamic load	8 kN
Static load	12 kN
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE