


Drawn cup roller bearing TAM3525-IKO - TAM3525-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/tam3525-iko>

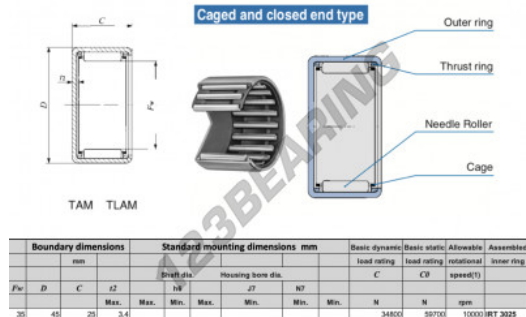

Boundary dimensions				Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed (1)		Assembled inner ring	
mm				mm				C		C0		rpm		mm	
Pw	D	C	d	TW	JT	N7	W	M	M	M	M	10000	BT 3025		
35	45	25	3.4	Max.	Min.	Max.	Min.	Min.	Min.	34800	59700	10000	BT 3025		

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060599568
Inside diameter	35 mm
Inside diameter	1.378" inch
Outside diameter	45 mm
Outside diameter	1.772" inch
Thickness	25 mm
Thickness	0.984" inch
Limiting speed	10000 rpm
Dynamic load	34.8 kN
Static load	59.7 kN
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE