


## Drawn cup roller bearing BHA1610-Z-IKO - BHA1610-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/bha1610-z-iko>

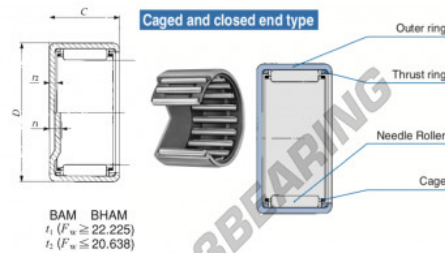

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable axial displacement	
$F_w$	$D$	$C$	$r$	$H$	$J$	$C$	$CF$	$C$	$CF$	relative	inner ring	
	Max.	Max.	Min.	Max.	Min.	Max.	Min.	N	N	mm	mm	
15.882 (1)	33.338 (1.313)	15.881 (0.625)	3.4					15300	22100	15000	-	

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060600400
Inside diameter	25.4 mm
Outside diameter	33.338 mm
Thickness	15.88 mm
Limiting speed	15000 rpm
Dynamic load	15.3 kN
Static load	22.1 kN
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE