


Drawn cup roller bearing BHAM1820-IKO - BHAM1820-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/bham1820-iko>

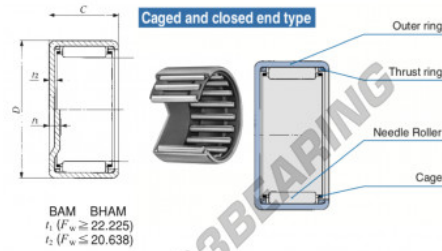

BAM BHAM
 $f_1 (F_w \geq 22.225)$
 $f_2 (F_w \leq 20.638)$

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable axial displacement	Allowable axial displacement
For	D	C	r	H	J1	Basic dynamic load rating	Basic static load rating	Allowable axial displacement	Allowable axial displacement
						C	CP	mm(kN)	mm(kN)
Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
28.875 (1.136)	38.100 (1.500)	31.752 (1.249)	3.4			37100	61100	1.000 (0.039)	1.428 (0.056)

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060600516
Inside diameter	28.575 mm
Outside diameter	38.1 mm
Thickness	31.75 mm
Limiting speed	13000 rpm
Dynamic load	37.1 kN
Static load	61.1 kN
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE