


## Drawn cup roller bearing BAM268-IKO - BAM268-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/bam268-iko>

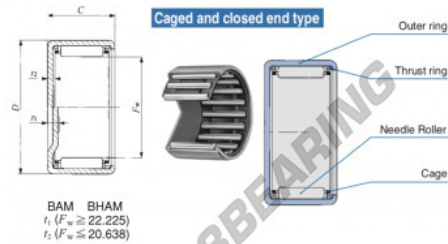

Boundary dimensions mm(inch)		Standard mounting dimensions mm		Basic dynamic load rating	Basic static load rating	Admissible rotational speed (min)	Assembled inner ring
$r_1$	$r_2$	$r_1$	$r_2$	C	CP	rpm	
41.275 (1.621)	50.800 (2.000)	12.701 (500)	0.3	Min	Max	Min	Max
				13700	19800	8000	—

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060600769
Inside diameter	41.275 mm
Outside diameter	50.8 mm
Thickness	12.7 mm
Limiting speed	8000 rpm
Dynamic load	13.7 kN
Static load	19.8 kN
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE