


## Drawn cup roller bearing BA1610-Z-IKO - BA1610-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba1610-z-iko>

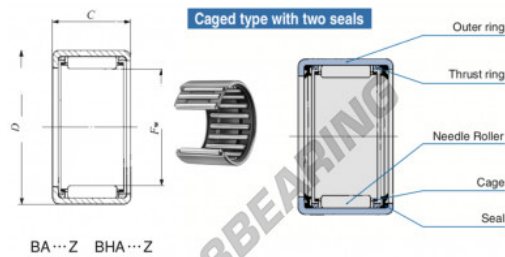

BA...Z BHA...Z

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(1)	Assembled inner ring	
$F_w$	$D$	$C$	$r_2$	$h_6$	Housing bore dia.	$J_1$	$C$	$C_0$	rpm		
15.40	31.75	15.88	0.2	0.05	Max.	Min.	Max.	Min.	11300	18100	15000

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601179
Inside diameter	25.4 mm
Outside diameter	31.75 mm
Thickness	15.88 mm
Limiting speed	15000 rpm
Dynamic load	11.3 kN
Static load	18.1 kN
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE