


## Drawn cup roller bearing BA1812-Z-IKO - BA1812-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba1812-z-iko>

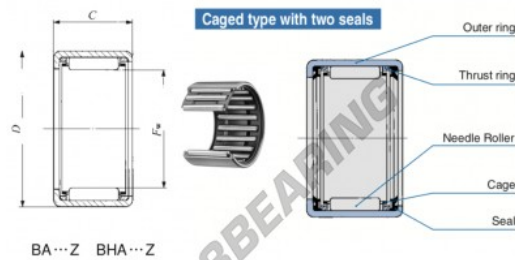

Boundary dimensions mm[inch]			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed <sup>1)</sup>	Assembled inner ring
$F_w$	$D$	$C$	$r_1$	Shaft dia. $\text{H}6$		Housing bore dia. $\text{J7}$		$C$	$C_0$			
				Max.	Min.	Max.	Min.	N	N	rpm		
28.675 (1.1286)	34.925 (1.375)	19.05 (0.75)	2.8					15000	26900	13000	RB 1412	

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601261
Inside diameter	28.575 mm
Outside diameter	34.925 mm
Thickness	19.05 mm
Limiting speed	13000 rpm
Dynamic load	15 kN
Static load	26.9 kN
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE