


Drawn cup roller bearing BA1916-Z-IKO - BA1916-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba1916-z-iko>

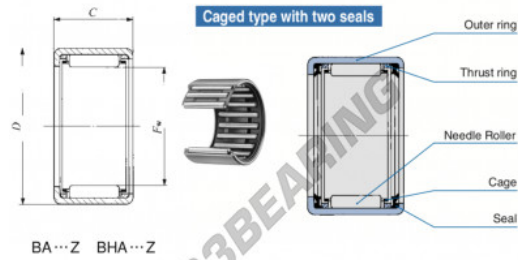

Boundary dimensions mm(Inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(1)	Assembled inner ring
F_w	D	C	t_2	Shaft dia. d_2	Housing bore dia. $\varnothing T$		C	C_0	rpm	
			Max.	Max.	Min.	Max.	Min.	N	N	
30.162 (1.1870)	38.100 (1.5000)	25.40 (1.000)	2.8	30.162	30.146	38.114	38.089	25800	45300	12000

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601308
Inside diameter	30.162 mm
Outside diameter	38.1 mm
Thickness	25.4 mm
Limiting speed	12000 rpm
Dynamic load	25.8 kN
Static load	45.3 kN
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE