


Drawn cup roller bearing BA2012-Z-IKO - BA2012-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba2012-z-iko>

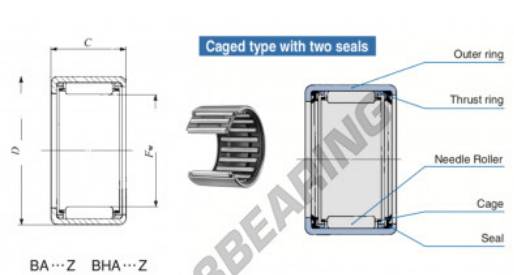

Boundary dimensions mm(inch)			Standard mounting dimensions mm			Basic dynamic load rating	Basic static load rating	Allowable rotational speed(1)	Assembled inner ring		
F_w	D	C	Shaft dia.	Housing bore dia.	JT	C'	CP	rpm			
31.790 (1.14)	38.100 (1.12)	19.05 (7/8)	Min. 2.8	Max. 31.750	31.734	Min. 38.114	Max. 38.089	15700	29600	12000	RB 1812

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601339
Inside diameter	31.75 mm
Outside diameter	38.1 mm
Thickness	19.05 mm
Limiting speed	12000 rpm
Weight	33 g
Dynamic load	15.7 kN
Static load	29.6 kN
Packaging	1
Standard	No standard

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE