


## Drawn cup roller bearing BA218-Z-IKO - BA218-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba218-z-iko>

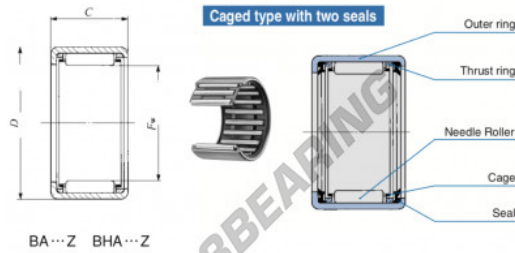

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(l)	Assembled inner ring
$F_w$	$D$	$C$	$d_2$	Shaft dia. $H7$	Housing bore dia. $J7$	$C$	$C_0$	rpm		
			Max.	Min.	Max.	Min.	N	N	RB 168-1	
33.338 (1.3125)	41.275 (1.625)	12.750 (0.502)	2.0				11100	15800	11000	

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601360
Inside diameter	33.338 mm
Outside diameter	41.275 mm
Thickness	12.7 mm
Limiting speed	11000 rpm
Dynamic load	11.1 kN
Static load	15.8 kN
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE