


## Drawn cup roller bearing BA2110-Z-IKO - BA2110-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba2110-z-iko>

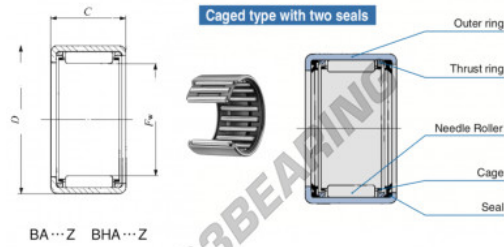

Boundary dimensions mm[inch]		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed <sup>(1)</sup>	Assembled inner ring	
<i>P<sub>w</sub></i>	<i>D</i>	<i>C</i>	<i>d<sub>1</sub></i>	<i>d<sub>2</sub></i>	<i>d<sub>3</sub></i>	<i>C</i>	<i>C<sub>0</sub></i>	rpm		
33.338 (1 5/16)	41.275 (1 5/8)	15.88 (5/8)	2.4	33.338 (1 1/4)	33.322 (1 1/4)	41.269 (1 5/8)	41.264 (1 5/8)	15400	23900	11000 (RB 1610-1)

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601377
Inside diameter	33.338 mm
Inside diameter	1 5/16" inch
Outside diameter	41.275 mm
Outside diameter	1 5/8" inch
Thickness	15.88 mm
Thickness	5/8" inch
Limiting speed	11000 rpm
Dynamic load	23.9 kN
Static load	11 kN
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE