


## Drawn cup roller bearing BA2410-Z-IKO - BA2410-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba2410-z-iko>

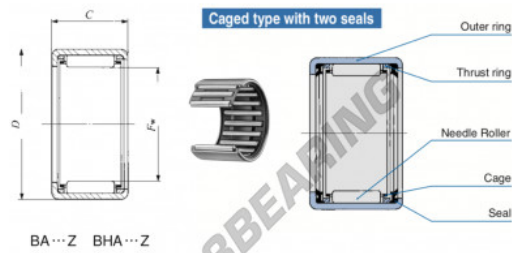

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Assembled inner ring
$f_w$	D	C	$d_2$	$d_1$	$d_2$	C	C <sub>0</sub>	speed(r)		
	Max	Max	Min	Max	Min	N	N	rpm		
38.100 (1.12)	47.625 (1.875)	15.88 (0.625)	2.6			17800	27100	9000	IRB 2010	

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601438
Inside diameter	38.1 mm
Outside diameter	47.625 mm
Thickness	15.88 mm
Limiting speed	9000 rpm
Dynamic load	17.8 kN
Static load	27.1 kN
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE