


Drawn cup roller bearing BA2412-Z-IKO - BA2412-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba2412-z-iko>

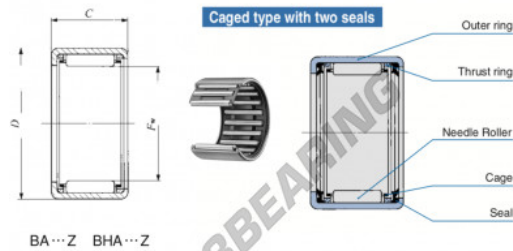

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r)	Assembled inner ring
F_w	D	C	d	H	d_1	C	C_0	rpm	
			Min.	Min.	Max.	Min.	N	N	
38.100 (1.12)	47.625 (1.88)	19.05 (.750)	2.8				22500	36900	9000

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601445
Inside diameter	38.1 mm
Inside diameter	1 1/2" inch
Outside diameter	47.625 mm
Outside diameter	1 7/8" inch
Thickness	19.05 mm
Thickness	3/4" inch
Limiting speed	9000 rpm
Dynamic load	22.5 kN
Static load	36.6 kN
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE