


Drawn cup roller bearing BA2610-Z-IKO - BA2610-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba2610-z-iko>

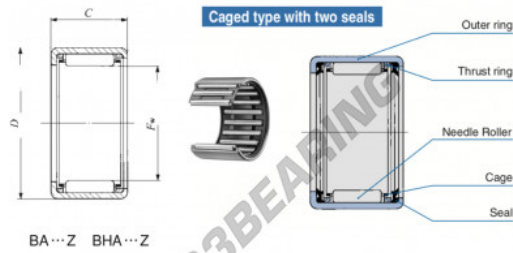

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic	Basic static	Allowable	Assembled
<i>F_w</i>	<i>D</i>	<i>C</i>	<i>l</i>	IS	<i>JT</i>	load rating	load rating	rotational	inner ring	
			Max.	Min.	Max.	Min.	N	N	rpm	
41.275 (1 5/8)	50.800 (2)	15.88 (625)	2.6				18900	30000	8000 (DB 2218)	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601490
Inside diameter	41.275 mm
Outside diameter	50.8 mm
Thickness	15.88 mm
Limiting speed	8000 rpm
Dynamic load	18.9 kN
Static load	30 kN
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE