


## Drawn cup roller bearing BA2824-Z-IKO - BA2824-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba2824-z-iko>

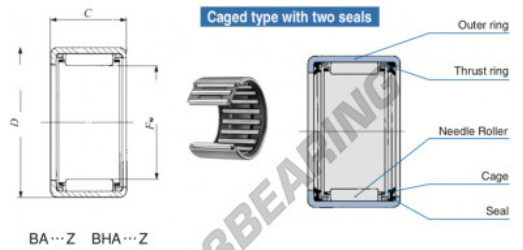

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed <sup>(1)</sup>	Assembled inner ring
$F_w$	$D$	$C$	$d_2$	$H_0$	$J_1$	$C$	$C_0$	rpm		
			Min.	Max.	Min.	Max.	Min.	Max.		
44.450 (1.746)	53.975 (2.125)	38.100 (1.500)	2.0				52000	113000	7500	IRB 2424

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601537
Inside diameter	44.45 mm
Outside diameter	53.975 mm
Thickness	38.1 mm
Limiting speed	7500 rpm
Dynamic load	52 kN
Static load	113 kN
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE