


Drawn cup roller bearing BA3216-Z-IKO - BA3216-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba3216-z-iko>

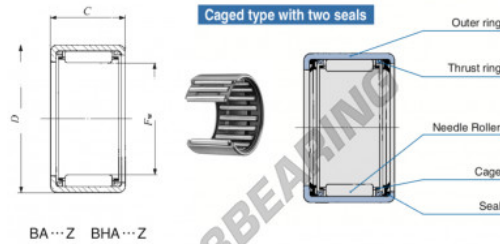

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
<i>F_w</i>	<i>D</i>	<i>C</i>	Mark dia. <i>d₁</i>	<i>H_e</i>	Housing bore dia. <i>d₂</i>	<i>C₁</i>	<i>C</i>	<i>C₀</i>	rpm	
	Max.	Max.	Max.	Min.	Max.	Min.	N	N		
50.800 (2)	60.325 (2.4 # 6)	25.40 (1.000)	2.6				37100	76500	6000	RB 2816

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601582
Inside diameter	50.8 mm
Outside diameter	60.325 mm
Thickness	25.4 mm
Limiting speed	6000 rpm
Dynamic load	37.1 kN
Static load	76.5 kN
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE