


Drawn cup roller bearing BA4216-Z-IKO - BA4216-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba4216-z-iko>

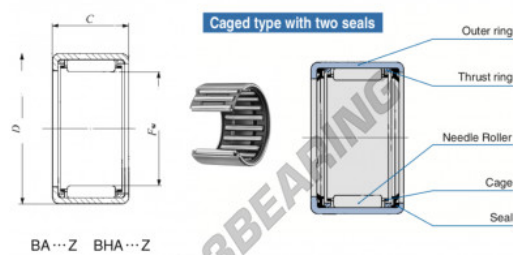

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(1)	Assembled inner ring
<i>F_w</i>	<i>D</i>	<i>C</i>	<i>d</i>	<i>h_d</i>	Housing bore dia.	<i>C</i>	<i>C₀</i>	<i>n</i>	<i>N</i>
			Max.	Max.	Min.	Max.	Min.	R	N
66.675 (2 5/8)	76.200 (3)	25.400 (1.000)	2.0	66.675 (2.625)	66.400 (2.614)	75.210 (2.961)	75.180 (2.959)	42000	87500
									4000 (MB 3616)

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601643
Inside diameter	66.675 mm
Outside diameter	76.2 mm
Thickness	25.4 mm
Limiting speed	4000 rpm
Dynamic load	42 kN
Static load	97.9 kN
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE