


## Drawn cup roller bearing BA4410-Z-IKO - BA4410-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba4410-z-iko>

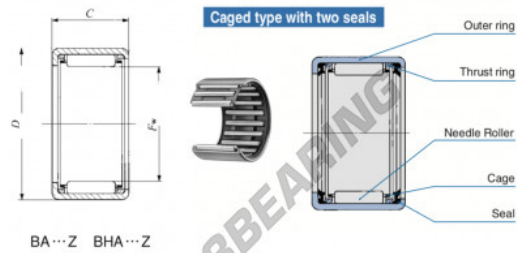

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(T)	Assembled inner ring
<i>F<sub>w</sub></i>	<i>D</i>	<i>C</i>	<i>d</i>		<i>H</i>		<i>C</i>	<i>CF</i>		
			Max.	Min.	Max.	Min.	N	N	rpm	
68.850 (2.711)	79.375 (3.125)	15.881 (0.625)	2.8				25000	50600	3500	

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601650
Inside diameter	69.85 mm
Outside diameter	79.375 mm
Thickness	15.88 mm
Limiting speed	3500 rpm
Dynamic load	25 kN
Static load	50.8 kN
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE