


## Drawn cup roller bearing BA59-Z-IKO - BA59-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba59-z-iko>

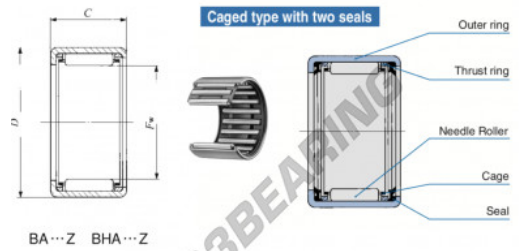

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed	Assembled inner ring
$F_w$	$D$	$C$	$d_2$	$d_0$	$d_1$	$d_2$	$C$	$C_0$	$N$	$N_0$	rpm	
7.938 (0.3125)	12.706 (0.5002)	14.271 (0.562)	1				4190	4360	45000	--		

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601742
Inside diameter	7.938 mm
Outside diameter	12.7 mm
Thickness	14.27 mm
Limiting speed	45000 rpm
Dynamic load	4.19 kN
Static load	4.36 kN
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE