


Drawn cup roller bearing BA1014-Z-IKO - BA1014-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba1014-z-iko>

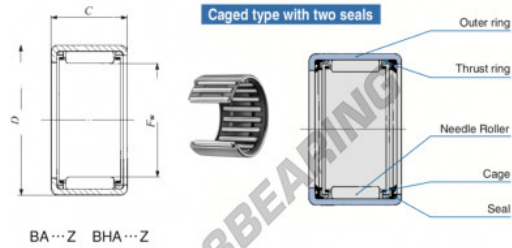

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r/min)	Assembled inner ring	
F_w	D	C	d_1	d_2	J_1	J_2	C	C_0			
			Shaft dia.	Housing bore dia.							
			Min.	Max.	Min.	Max.	N	N	rpm		
15.875 (5/8)	20.638 (0.814)	22.22 (0.875)	1.3	15.875	15.854	20.650	20.620	10700	17500	25000	RB T14

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060602985
Inside diameter	15.875 mm
Outside diameter	20.638 mm
Thickness	22.22 mm
Limiting speed	25000 rpm
Weight	100 g
Dynamic load	10.7 kN
Static load	17.5 kN
Packaging	-
Standard	No standard

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE