


Drawn cup roller bearing BA1016-Z-IKO - BA1016-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba1016-z-iko>

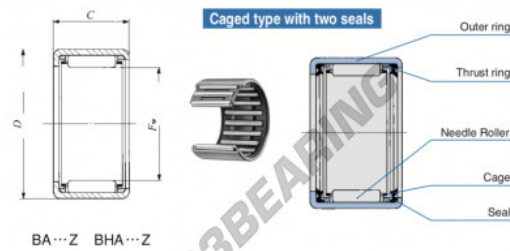

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic	Basic static	Allowable	Assembled
P_{10}	D	C	Shaft dia.	Housing bore dia.	C	C_1	load rating	load rating	rotational	inner ring
			d_2	H	J				speed(r)	
15.875	20.638	25.401	1.2	15.875	15.864		20.630	20.620	12300	20800
			Max.	Max.	Min.	Max.	Min.	Min.	N	N
									rpm	rpm

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060602992
Inside diameter	15.875 mm
Outside diameter	20.638 mm
Thickness	25.4 mm
Limiting speed	25000 rpm
Dynamic load	12.3 kN
Static load	20.8 kN
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE