


Drawn cup roller bearing BA1110-Z-IKO - BA1110-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba1110-z-iko>

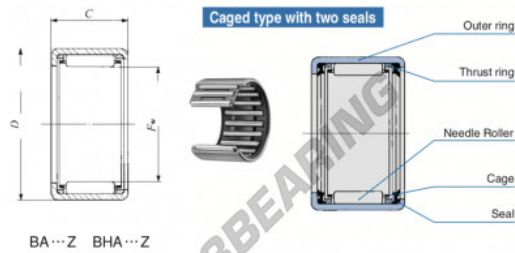

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(I)	Assembled inner ring	
F_w	D	C	d_2	d_3	Housing bore dia.	C	CF			
	Max.	Max.	Min.	Max.	Min.	Min.	Min.	rpm		
17.462 (0.6875)	22.225 (0.875)	15.88 (0.625)	1.3	17.462 (0.6875)	17.461 (0.6873)	22.237 (0.8755)	22.210 (0.8744)	8280	13000	25000

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603135
Inside diameter	17.462 mm
Outside diameter	22.225 mm
Thickness	15.88 mm
Limiting speed	25000 rpm
Dynamic load	8.28 kN
Static load	13 kN
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE