


Drawn cup roller bearing BA1212-Z-IKO - BA1212-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba1212-z-iko>

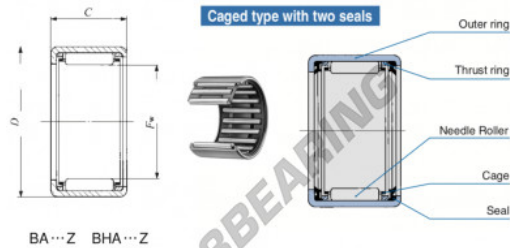

| Boundary dimensions mm(inch) | Standard mounting dimensions mm | | | | Basic dynamic load rating | Basic static load rating | Allowable rotational speed(1) | Assembled inner ring | | | |
|------------------------------|---------------------------------|----------------|-----|--------|---------------------------|--------------------------|-------------------------------|----------------------|-------------------|-------|-----------|
| | D | C | r2 | b6 | | | | | Housing bore dia. | C | C0 |
| 19.050 (0.4) | 25.400 (1) | 19.050 (0.750) | 1.3 | 19.050 | 19.037 | 25.412 | 25.391 | 11900 | 17700 | 20000 | IRB 812-1 |

PRODUCT FEATURES

| | |
|------------------|---------------|
| Brand | IKO |
| N° Ean13 | 3616060603180 |
| Inside diameter | 19.05 mm |
| Outside diameter | 25.4 mm |
| Thickness | 19 mm |
| Limiting speed | 20000 rpm |
| Dynamic load | 11 kN |
| Static load | 17 kN |
| Packaging | 1 |

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE