


## Drawn cup roller bearing BA1310-Z-IKO - BA1310-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba1310-z-iko>

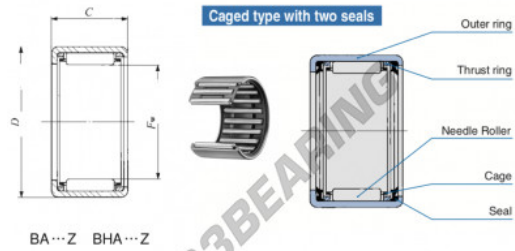

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed <sup>(1)</sup>	Assembled inner ring
<i>F<sub>0</sub></i>	<i>D</i>	<i>C</i>	<i>i2</i>	<i>h6</i>	<i>J7</i>	<i>C</i>	<i>C0</i>	rpm		
	Max.	Max.	Max.	Min.	Max.	Min.	N	N		
25.638 (10.110)	26.988 (1.111)	15.881 (625)	1.3	20.630 (20.625)	27.010 (26.975)	9.870	14.200	19000	RB 910	

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603234
Inside diameter	20.638 mm
Outside diameter	26.988 mm
Thickness	15.88 mm
Limiting speed	19000 rpm
Dynamic load	9.87 kN
Static load	14.2 kN
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE